

FloWell

FloWell* is a dynamic underbalance system designed to improve productivity by the removal of skin and perforation damage.

FloWell is a slickline deployable system that can be used to create a dynamic underbalance across a pre-determined interval within a monobore/pseudo-monobore completion string.

The system utilizes Peak's unique field proven SIM* and SIM^{PLUS}* Plug Systems as a means of zonal isolation between which the FloWell System is run and activated.


Its modular design offers flexibility and enables varying lengths of sand face to be treated. The packer isolation alleviates any chance of unwanted stimulation in zones of no interest.

APPLICATIONS

- To remove formation damage in perforation tunnels
- Recover injectivity in injection wells

FEATURES AND BENEFITS

- Uses standard slickline tools and running procedures
- Safe – 100% mechanical, no pyrotechnics or electronics required
- Modular design allowing any length of zone to be treated
- Easily field redressable in remote locations
- Sized to pass through standard completion restrictions
- Standard fishing neck design for simple recovery
- High temperature applications up to 350 degF
- Cost-effective means of improving productivity

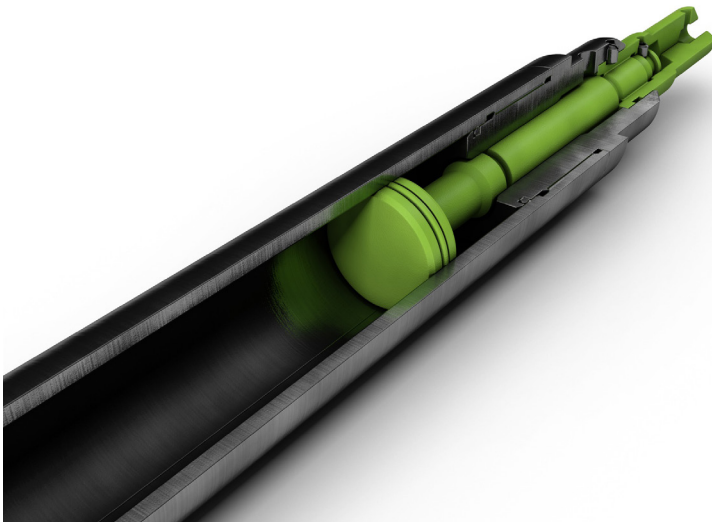

*Mark of Schlumberger

Product Code: FloWell / 420

info@peakwellsystems.com | peakwellsystems.com

© 2017 Peak Well Systems Pty Ltd. All rights reserved. Revision: 17th December 2015

peak 
WELL SYSTEMS