

# Peak Cutter

**The Peak Cutter is a unique, power-charged, non-explosive cutter that is dropped from surface to sever slicklines and cables in the event that a toolstring becomes stuck downhole.**

It is designed to cut cleanly above the toolstring assembly - safely and reliably - and allow the upper section of the wire/cable to be recovered quickly to surface.

## APPLICATIONS

- Deployment in the event that a toolstring becomes stuck downhole
- Recovery of wire or cable from situations where wire or tools have been blown up hole
- Deployment in subsea wells where the Peak Cutter is held as a contingency within a tool catcher integral to the seabed well control package


## FEATURES AND BENEFITS

- Incorporates an integral non-hydraulic, non-pyrotechnic power charge, a contingent cutting arrangement and integral wire/cable clamp assembly
- No need for explosives, so the Peak Cutter is also safe to deploy
- Capable of cutting all industry wire from 0.108-in slickline up to 5/16-in heavy-duty Dyform cable
- Supplied with three retaining plates which cover full 0.108-in – 0.312-in range of tool
- Rollerized versions are available on request subject to completion size
- Simple field redress
- Supplied with safety clamp for secure and safe handling at the well site
- Offers an accurate and reliable result, particularly when deployed in high viscous fluids and deviated wells
- Available for rapid rental with immediate mobilization
- Does not require radio silence

## TECHNICAL INFORMATION

Actual OD, in	Fish Neck Size, in	Length, in
2.185	1.375	45.0
2.500*	2.313	44.4
2.800 (Rollerized)	1.375	43.7

\*Rollerized versions available on request.

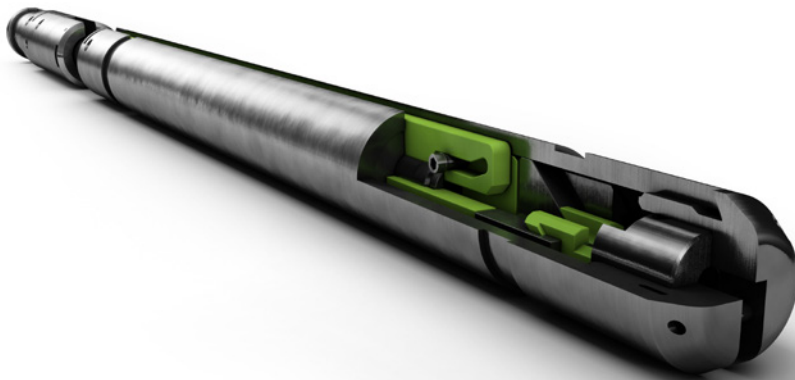

**Product Code:** Peak Cutter / 215

info@peakwellsystems.com | peakwellsystems.com

© 2017 Peak Well Systems Pty Ltd. All rights reserved. Revision: 26th September 2017

**peak**   
WELL SYSTEMS